



### TECHNICAL CHARACTERISTICS

Type:	Wall fixture
IP Protection degrees:	IP44
Light source 1:	1 x 2G11 36W
Total power consumption (W):	34
Voltage / Frequency:	220-240V/50-60Hz
Warranty (Years):	2
Units per box:	4
Net Weight (Kg):	1.57
EAN:	8435111090343




### MATERIALS / FINISHES


<b>Structure material:</b>	Steel	<b>Diffuser material:</b>	Glass
<b>Structure finish:</b>	Chrome	<b>Diffuser finish:</b>	Opal

### GEAR

Gear included: Yes, electronic

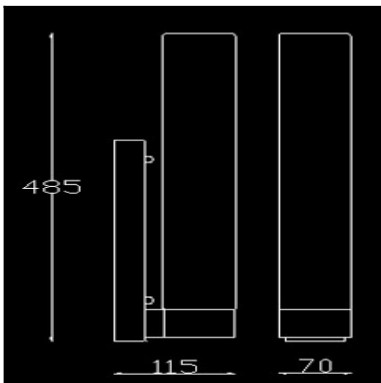

[Download photometric file .ldt / .ies](#)

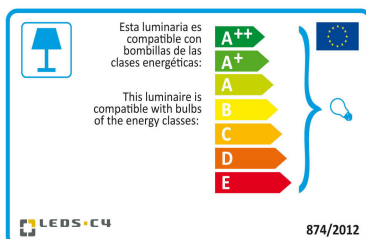


[Click on image to download energy label](#)

<b>Luminaire</b>		<b>Measur.</b>		<b>Lamp</b>	
Code	05-0028	Code	05-0028	Code	FLUORESCENT
Name	WALL LIGHT	Name	WALL LIGHT	Number	1
Line	Eulumdat	Date	15-11-2013	Position	
Efficiency	13.43%	Coordinate system	CG	Total Flux	3500.00 lm
Maximum value	71.19 cd	Position	C=270.00 G=38.00	Asymmetrical	
Rectangular Luminaire	Length	1 mm	Width	1 mm	Height
Rectangular Luminous Area	Length	1 mm	Width	1 mm	Height
Horizontal Luminous Area	0.000001 m2	Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.000000 m2	
Symmetry Type	Asymmetrical	Maximum Gamma Angle		180	
Measurement Distance	0.00	Measurement Flux		3500.00 lm	
Operator		Source voltage			
Temperature	25.00 °C	Source current			
Humidity	60.00 %	Photocell			
Notes					

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	FLUORESCENT	FLUORESCENT - 36.00 W	3500.00	36.00	1
C.I.E.	29 56 79 67 13	D DIN 5040		B11	
F UTE	0.09 J + 0.04 T	B NBN		BZ 7	

1mm x 1mm



**C Halfplanes**

180.0 — 0.0

270.0 — 90.0

ULOR      4.39 %

DLOR      9.04 %

RN         32.68 %

