OUT

GEA
55-9280-Y4-37

The photograph may not match the reference exactly. Please read the product description to identify the finish.

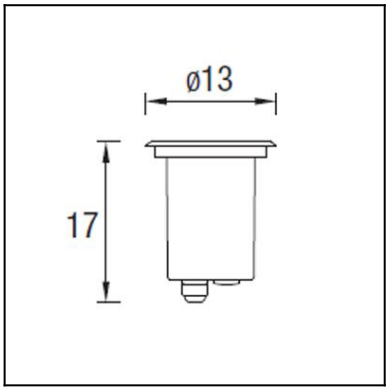

TECHNICAL CHARACTERISTICS

Type:	UPLIGHT RECESSED
IP Protection degrees:	IP67
IK Protection degrees:	IK10
Light source 1:	1 x GU10 MAX 50W Maximum lamp length: 82.00 mm
Voltage / Frequency:	230V/50-60Hz
Warranty (Years):	2
Units per box:	8
Net Weight (Kg):	0.63
EAN:	8435111053522

MATERIALS / FINISHES

Structure material:	Stainless steel AISI304 Technopolymer	**Diffuser material:**	Glass
Structure finish:	Polished	**Diffuser finish:**	Tempered

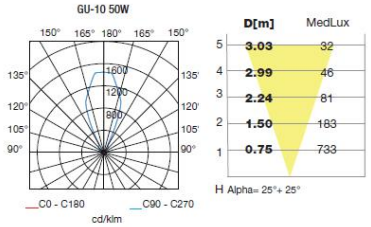

Download photometric file .ldt /.ies

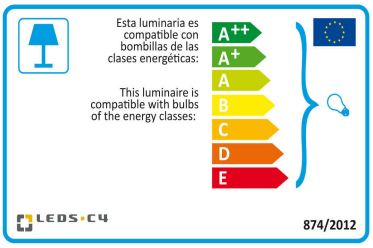

Click on image to download energy label

LEDS-C4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.
Please consult the sales team to clarify any doubt.

(+34) 973 468 100
leds-c4@leds-c4.com
www.leds-c4.com

Luminaire		**Measurem.**		**Lamp**	
Code	55-9280-Y4	Code	74_03_03	Code	GU10 35W
Name	GEA	Name	GEA	Number	1
Line	Eulumdat	Date	29-04-1994	Position	

Efficiency	100.00%	Coordinate system	CG	Total Flux	230.00 lm
Maximum value	526.70 cd	Position	C=0.00 G=1.00	Rotosymmetrical	

Rectangular Luminaire	Length	125 mm	Width	125 mm	Height	169 mm
Rectangular Luminous Area	Length	100 mm	Width	100 mm	Height	0 mm

Horizontal Luminous Area	0.010000 m2	Emitting area on Plane 180°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°	0.002419 m2

Symmetry Type	Rotosymmetrical	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	230.10 lm

Operator		Source voltage	
Temperature	25.00 °C	Source current	
Humidity	60.00 %	Photocell	
Notes			

Luminaire Lamps

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	GU10 35W	GU10 35W - 50.00 W	230.00	50.00	1

C.I.E.	82 94 97 100 100	D DIN 5040	A60
F UTE	1.00 B	B NBN	BZ 1

125mm x 125mm



C Halfplanes

180.0 — 0.0

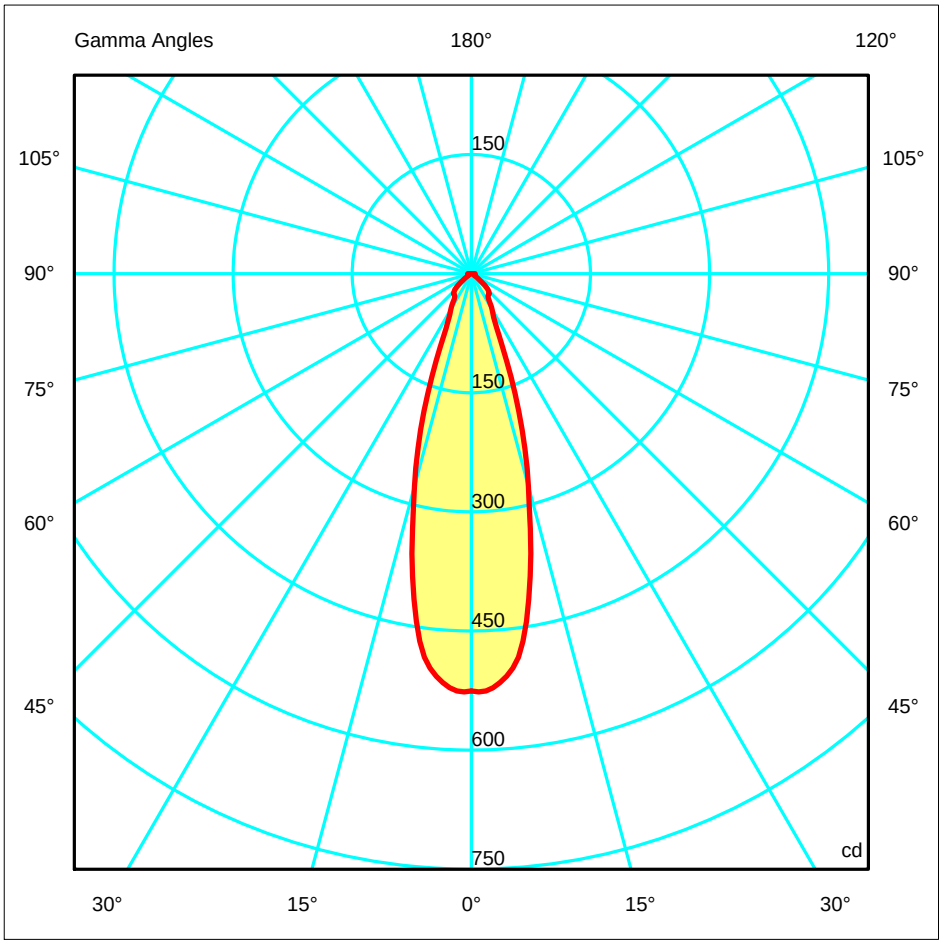

ULOR	0.11 %
DLOR	99.88 %
RN	0.11 %

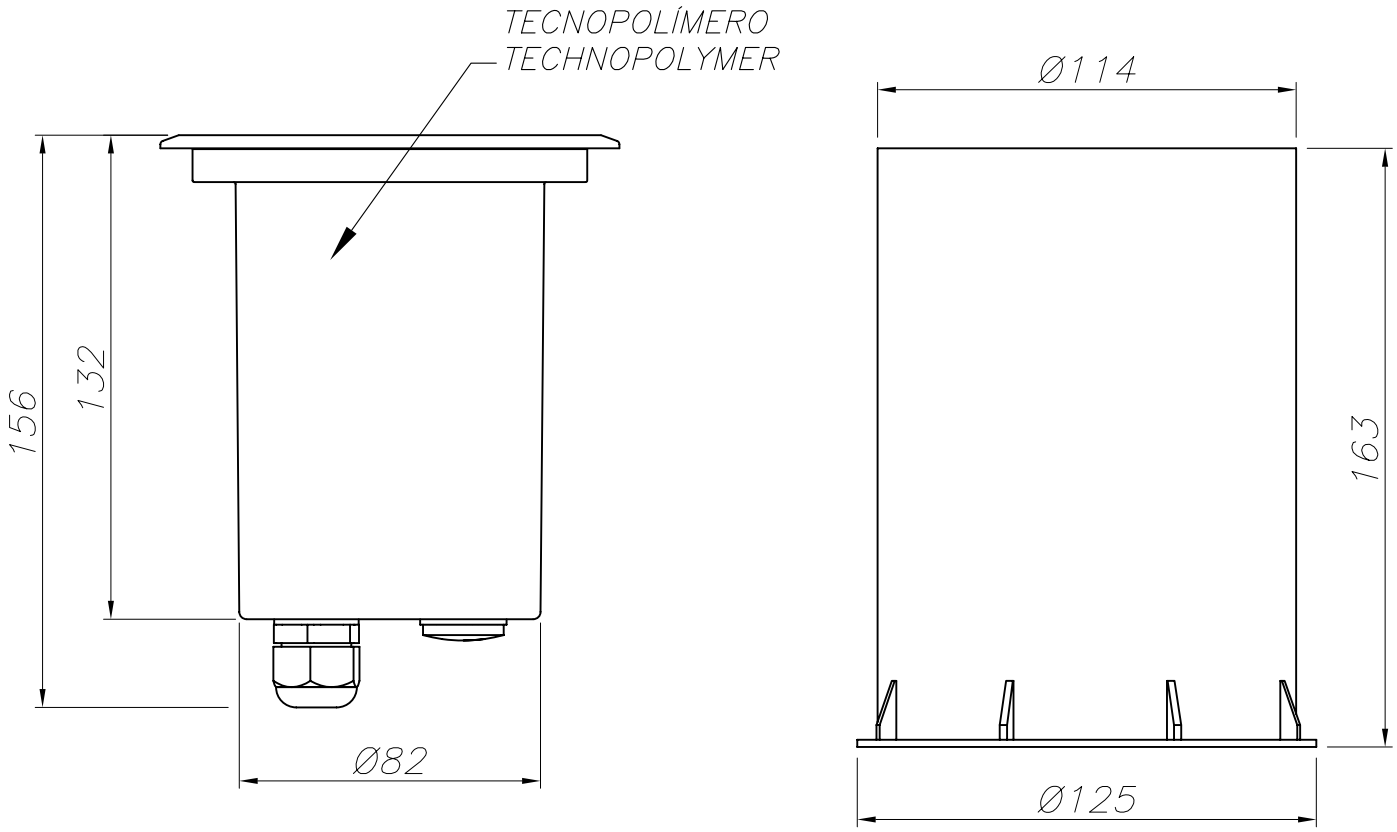

CAJA DE EMPOTRAR
FLUSH FITTING BOX

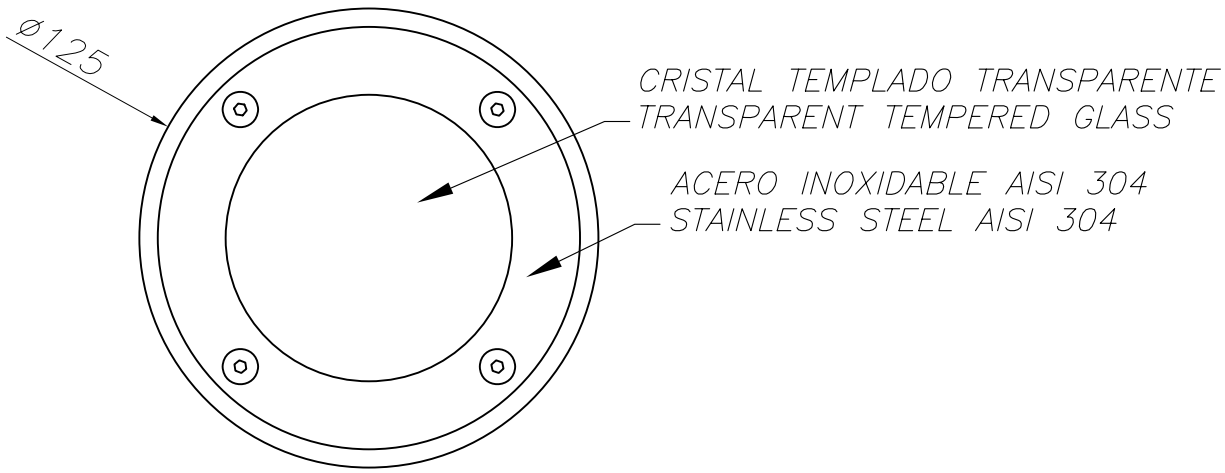

LEDS-C4

OUTDOOR
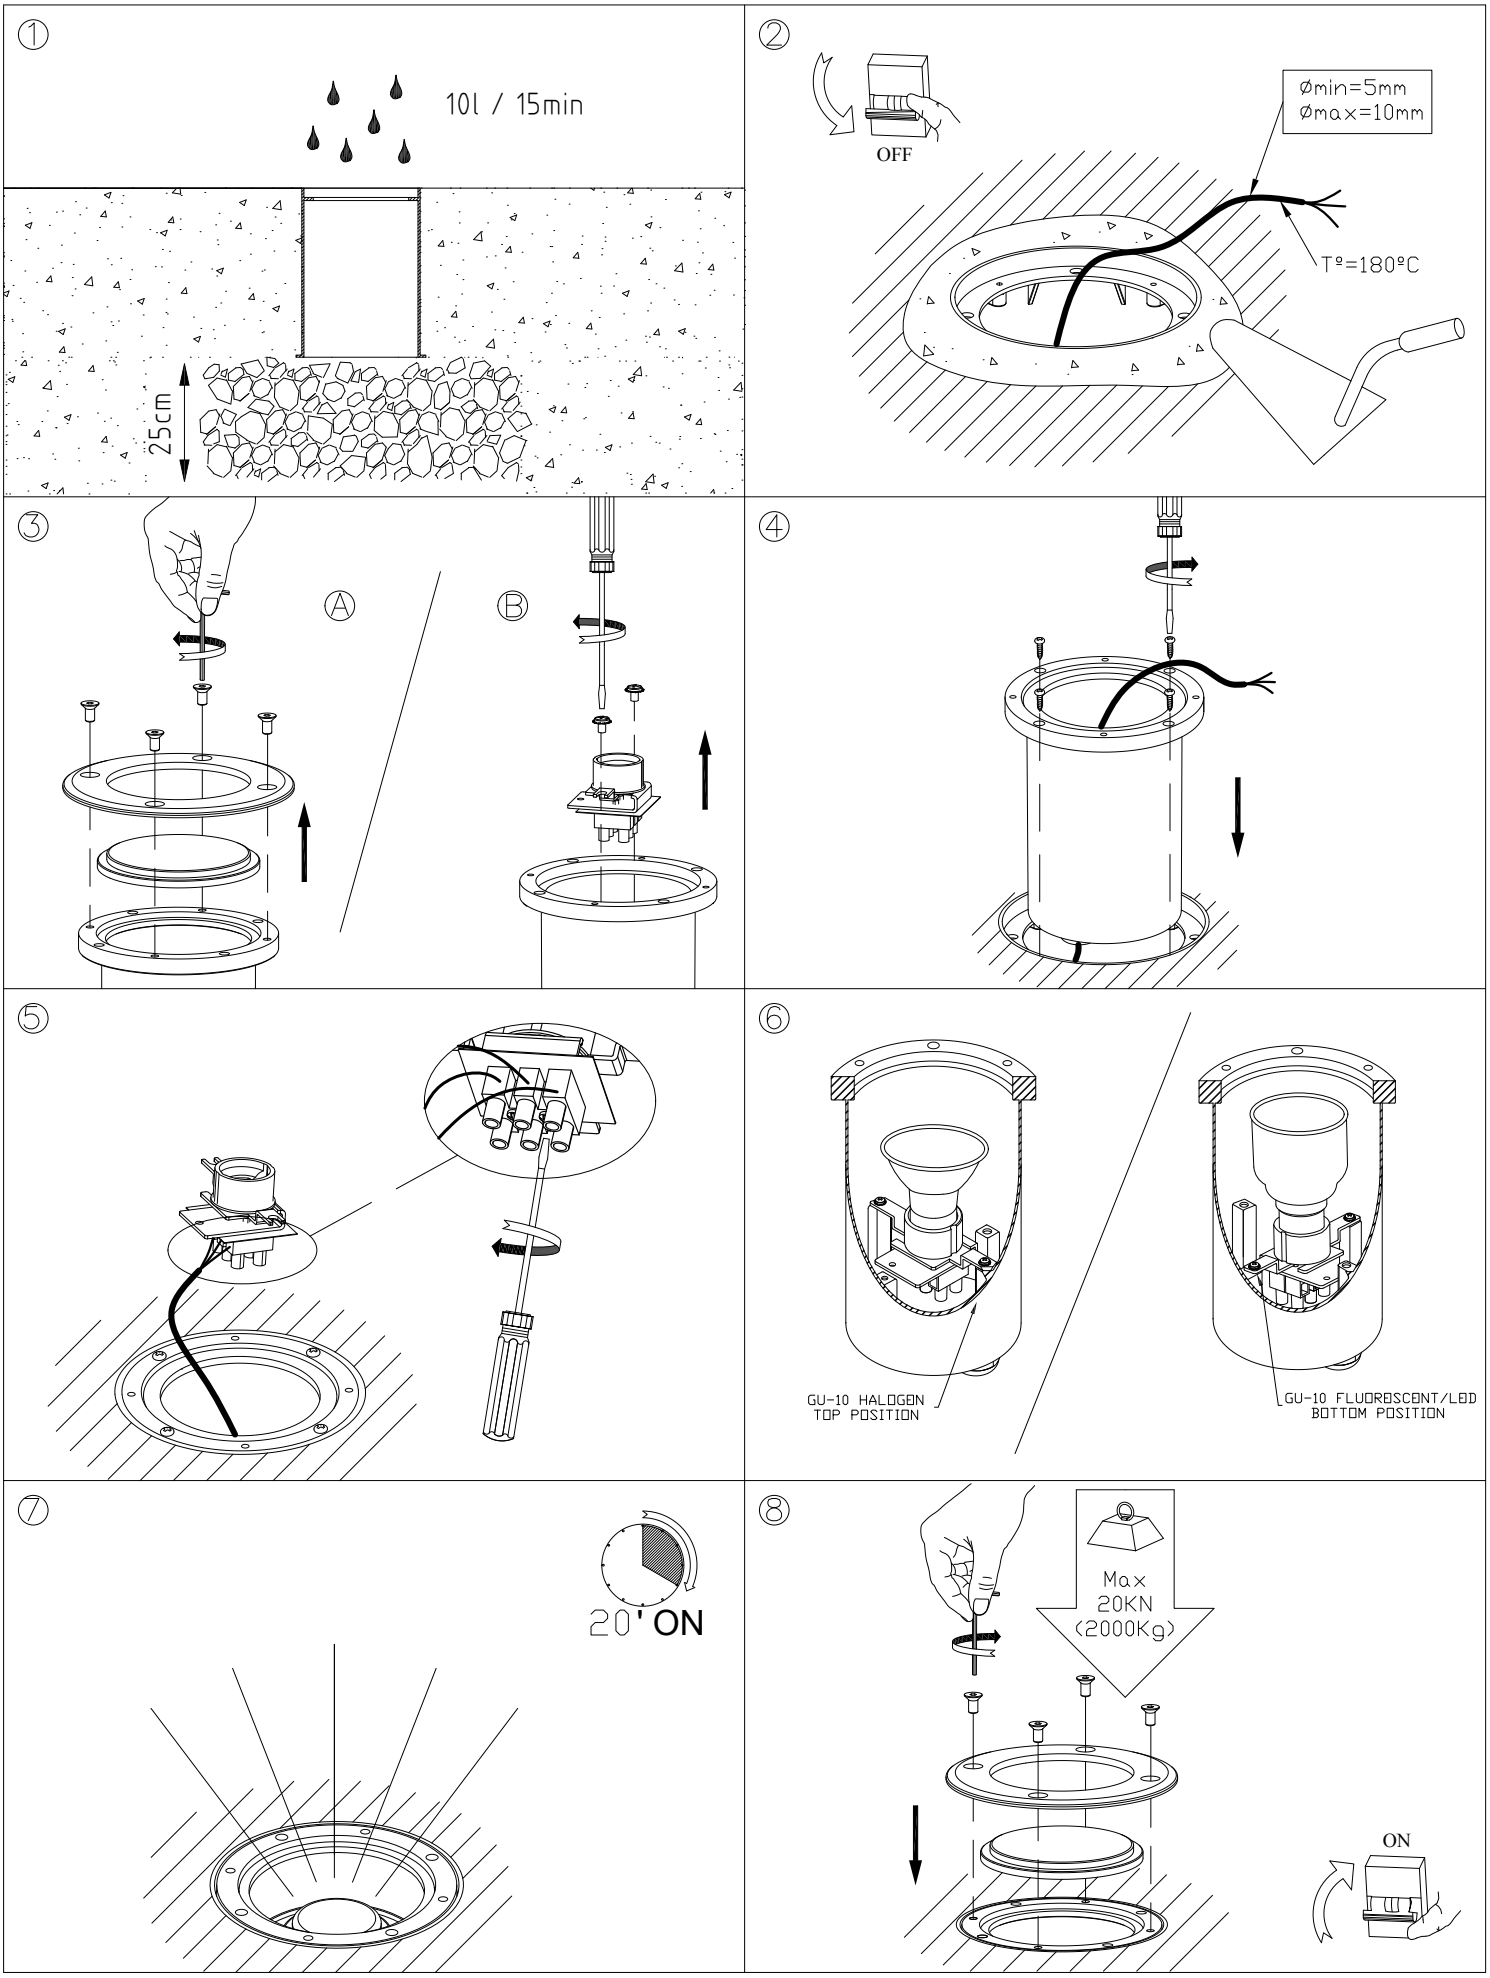
55-9280
55-9281
55-9284