



# GEOMETRIC RING MAX DALI

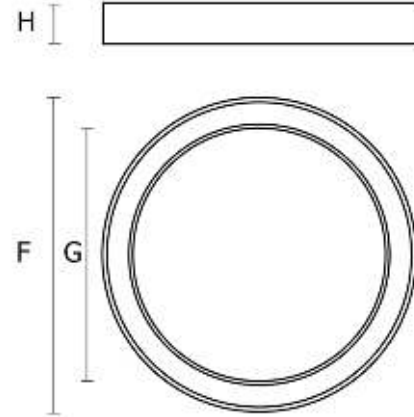

Varenr	Driftspenning	Effekt	Fargetemp	Lumen	Ra-index	Farge	Mål	Beskrivelse
AE007.1111.830.D000	220-240V	146W	3000K	15600 lm	> 80	Hvit	H62 F1400 G1200mm	MAX CIRCLE - DI
AE007.3311.830.D000	220-240V	146W	3000K	15600 lm	> 80	Sort	H62 F1400 G1200mm	MAX CIRCLE - DI
AE008.1111.830.D000	220-240V	166W	3000K	17700lm	> 80	Hvit	H62 F1600 G1400mm	MAX CIRCLE - DI
AE008.311.830.D000	220-240V	166W	3000K	17700lm	> 80	Sort	H62 F1600 G1400mm	MAX CIRCLE - DI
AE009.1111.830.D000	220-240V	220W	3000K	23700lm	> 80	Hvit	H62 F2100 G1900mm	MAX CIRCLE - DI
AE009.3311.830.D000	220-240V	220W	3000K	23700lm	> 80	Sort	H62 F2100 G1900mm	MAX CIRCLE - DI
AE010.1111.830.D000	220-240V	300W	3000K	32400lm	> 80	Hvit	H62 F2800 G2600mm	MAX CIRCLE - DI
AE010.3311.830.D000	220-240V	300W	3000K	32400lm	> 80	Sort	H62 F2800 G2600mm	MAX CIRCLE - DI
AE011.1111.830.D000	220-240V	429W	3000K	46100lm	> 80	Hvit	H62 F4000 G3800mm	MAX CIRCLE - DI
AE011.3311.830.D000	220-240V	429W	3000K	46100lm	> 80	Sort	H62 F4000 G3800mm	MAX CIRCLE - DI
AE012.1111.830.D000	220-240V	574W	3000K	61600lm	> 80	Hvit	H62 F5300 G5100mm	MAX CIRCLE - DI
AE012.3311.830.D000	220-240V	574W	3000K	61600lm	> 80	Sort	H62 F5300 G5100mm	MAX CIRCLE - DI
AE013.1111.830.D000	220-240V	267W	3000K	25660lm	> 80	Hvit	H108 F1600 G1400mm	MAX CIRCLE - DI-16990lm / IN-8670lm
AE013.3311.830.D000	220-240V	267W	3000K	25660lm	> 80	Sort	H108 F1600 G1400mm	MAX CIRCLE - DI-16990lm / IN-8670lm
AE014.1111.830.D000	220-240V	334W	3000K	31920lm	> 80	Hvit	H108 F2000 G1800mm	MAX CIRCLE - DI-21140lm / IN-10780lm
AE014.3311.830.D000	220-240V	334W	3000K	31920lm	> 80	Sort	H108 F2000 G1800mm	MAX CIRCLE - DI-21140lm / IN-10780lm

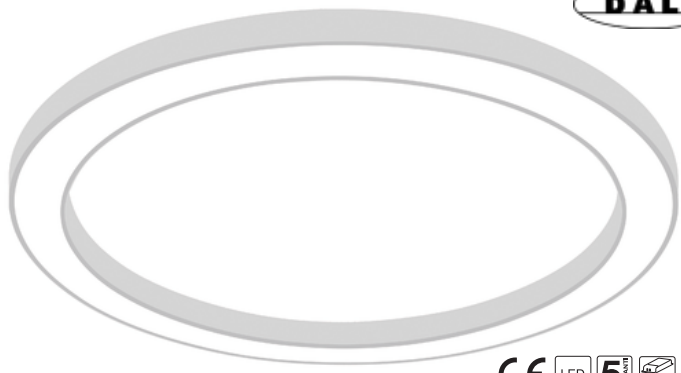

Fargetemperatur 3000K  
 Beskyttelsesgrad IP40  
 Lysfordeling Direkte og Direkt/Inderekt (DI og DI/IN)  
 Farger 1111 (Hvit) 3311 (Sort)  
 Diffusor Opal  
 Styling/dimming ( D000 ) DALI, Av og på  
 Levetid > 72000 timer



1400mm



1600mm



2100mm



2800mm



4000mm



5300mm