



GEOMETRIC RING DALI

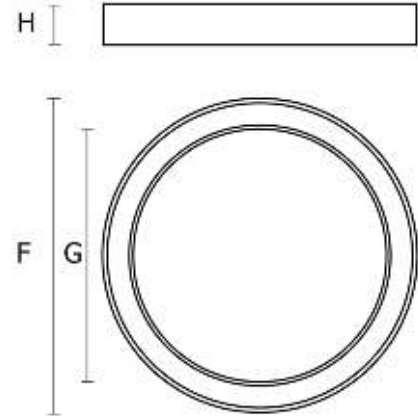

| Varenr | Driftspenning | Effekt | Fargetemp | Lumen | Ra-index | Farge | Mål | Beskrivelse |
|---------------------|---------------|--------|-----------|---------|----------|-------|--------------------|------------------------------|
| AE001.1111.830.D000 | 220-240V | 86W | 3000K | 8390lm | > 84 | Hvit | H62 F800 G600mm | Ring - DI |
| AE001.3311.830.D000 | 220-240V | 86W | 3000K | 8390lm | > 84 | Sort | H62 F800 G600mm | Ring - DI |
| AE002.1111.830.D000 | 220-240V | 140W | 3000K | 13580lm | > 84 | Hvit | H62 F1200 G1000mm | Ring - DI |
| AE002.3311.830.D000 | 220-240V | 140W | 3000K | 13580lm | > 84 | Sort | H62 F1200 G1000mm | Ring - DI |
| AE003.1111.830.D000 | 220-240V | 124W | 3000K | 12030lm | > 84 | Hvit | H108 F800 G600mm | Ring - DI-8440lm / IN-3590lm |
| AE003.3311.830.D000 | 220-240V | 124W | 3000K | 12030lm | > 84 | Sort | H108 F800 G600mm | Ring - DI-8440lm / IN-3590lm |
| AE004.1111.830.D000 | 220-240V | 200W | 3000K | 18920lm | > 84 | Hvit | H108 F1200 G1000mm | Ring - DI-13270lm/ IN-5650lm |
| AE004.3311.830.D000 | 220-240V | 200W | 3000K | 18920lm | > 84 | Sort | H108 F1200 G1000mm | Ring - DI-13270lm/ IN-5650lm |

| | |
|------------------|--|
| Fargetemperatur | 3000K |
| Beskyttelsesgrad | IP40 |
| Lysfordeling | Direkte og Direkt/Inderekt (DI og DI/IN) |
| Farger | 1111 (Hvit) 3311 (Sort) |
| Diffusor | Opal |
| Styring/dimming | (D000) DALI, Av og på |
| Levetid | > 72000 timer |

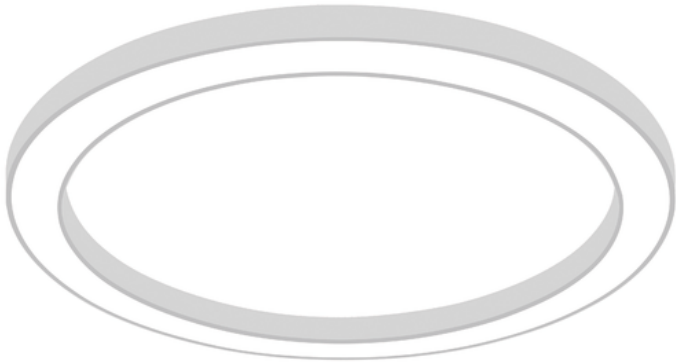