

Simple Corner LED



Luminaire for universal use in all types of office spaces: hallways, conference rooms, computer rooms etc. Simple Corner LED is available in the parabolic louver (PAR) version or with OPAL diffuser. The possibility of DALI lighting control - on request.

Materials: powder painted steel sheet body (standard color: white), OPAL diffuser made of polycarbonate

Installation: into modular ceilings 600x600 with a visible supporting structure. The luminaire should be installed together with original ceiling panels which are not part of the order

Power: 230 V

ELECTRICAL DATA

Light source	LED
Luminaire power	17 W
Number of light sources	1
Light source power	17W
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Type of LED	5630
Power factor	0.98

MECHANICAL DATA

Type of installation	Recessed
Housing material	Steel sheet

INFORMATION

Colour	White
Operating temperature range	0 ... 40 °C

CERTIFICATES

Degree of protection (IP)	IP40
Degree of protection (IP) / top/	IP20
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes
For ceiling installation, fire class "F" (L)	Yes

LIGHT DATA


Light colour	White
Color rendering index	83
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L90
Lifetime	> 54000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	89 %

OPTICAL DATA

Louver/ shutter	OPAL
Diffuser material	Opal/mat plastic
Reflector	High gloss

AVAILABLE VARIANTS

Product code	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature [K]
PX2067001	1720	101	3000
PX2067008	1750	103	4000

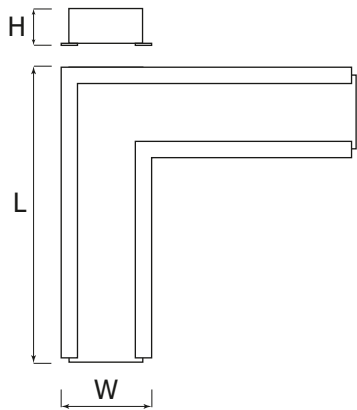

DIMENSIONS

L [mm]	W [mm]	H [mm]
355	134	88

L = Length | W = Width | H = Height /
Depth