


STRATOS V2 SIDELED OPAL

LUMEN TOOLS




Lyskilde:	LED
Effekt	34W / 40W
Fargetemperatur:	3000K/4000K
CRI:	> 90
Effektivitet:	130lm/W
Lumen 34W	4420lm
Lumen 40W	5200lm
UGR:	< 22
MacAdam:	< 3 SDCM
Vekt:	Ca. 3kg
Driftspenning:	220-240 V
Frekvens:	50-60 Hz
Beskyttelsesgrad:	IP40/IP44
Farger:	RAL9016 (Hvit)
Kjøle metode:	Passiv
Dimbar:	DALI / Triac
Mål:	595x595x12mm 1195 x 295 x 12mm
Levetid:	L90 100.000t
Garanti:	5 år

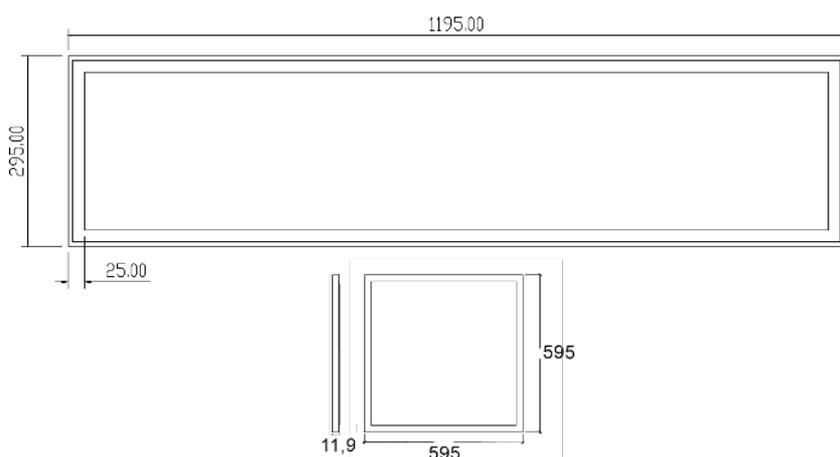

DALI2 push driver:	
Lekkasje strøm	0,31mA
Start strøm	3,79A 170us
Type	AM
DALI2 CLO driver:	
Lekkasje strøm	0,45mA
Start strøm	8,45A 270us
Type	AM
Triac driver:	
Lekkasje strøm	0,7mA
Start strøm	15A 650us
Av/På driver:	
Lekkasje strøm	0,3mA
Start strøm	20,64A 220us

Mål: Surface frame 60x60

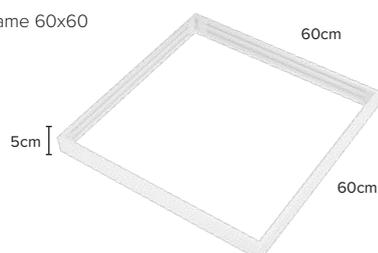

Mål: Surface frame 1200x30



DALI2 driver



Triac driver



DALI2 CLO driver



Av/På driver



Varenr	Beskrivelse
100268	LT Stratos V2 SideLED Opal 34W 930 595x595x12
100269	LT Stratos V2 SideLED Opal 34W 940 595x595x12
100270	LT Stratos V2 Side LED Opal 34W 930 1195x295x12
100291	LT Stratos V2 IP44 SideLED Opal 34W 930 595x595x12
Varenr	Drivere
100115	LT Stratos V2 34W Dali Driver Li-Nect
100117	LT Stratos V2 34W/Dip CLO Dali Driver Li-Nect
100293	LT Stratos V2 34W Driver Triac 3m cable
100294	LT Stratos V2 34W driver on/off 3m cable
100316	SURFACE FRAME V2 60x60, White
2161-SURF1	SURFACE FRAME 120x30, White
STRATOSSUS2	SUSPENSION 2m 2pcs/set