

Bloom Maxi Floodlight 5085W/WRRRCMB Floodlights - Adjustable Floodlight - 24Vdc



Rev. 27/02/2024



The minimal shape gives the BLOOM MAXI series wide adaptability to any project, ensuring total flexibility and allowing its integration in multiple contexts. The wide range of accessories allows a versatile use: the BLOOM MAXI projectors can be contextualized in gardens, for lighting plants, hedges, flower areas or to enhance architectural elements, because LIGHT is the fundamental element for a correct perception of objects, spaces and emotions.



NEWS 2024

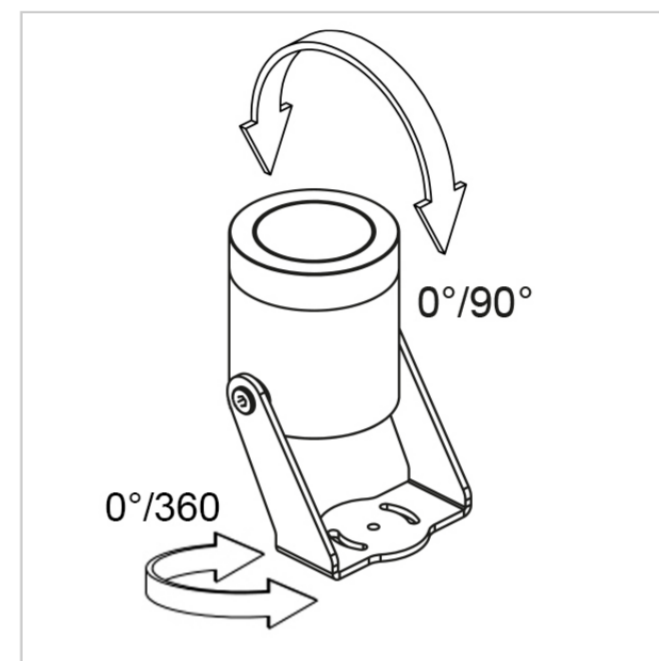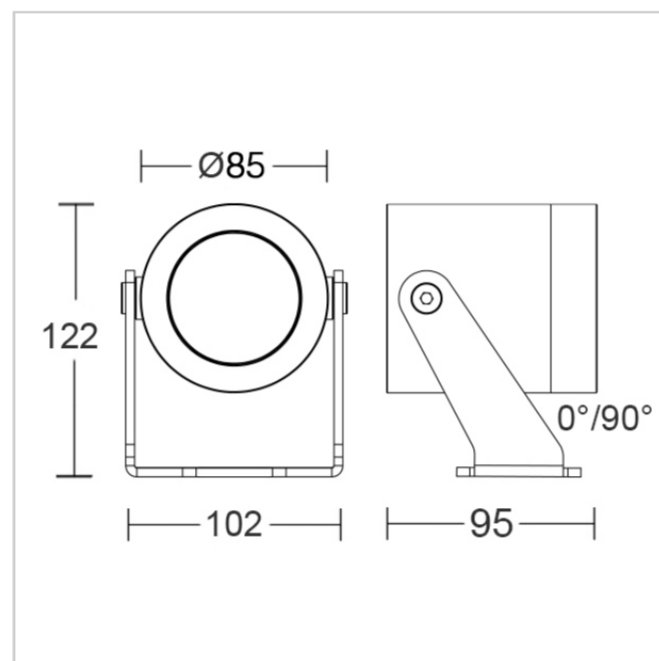

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall, ceiling and stand installation

PROTECTION

IP 66 - IK 09

BODY

Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

SCREEN

Transparent extra-clear glass 12mm

SEALS

Closed-cell EPDM rubber

SCREWS

Chromed brass

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 122 x L 102 x W 95 x Ø 85

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

24Vdc

DRIVER

Remote Driver NOT INCLUDED

DRIVER CURRENT

24Vdc

CONTROL

ON/OFF

POWER MODULE LED

15W

ABSORBED POWER

15W

SOURCE

LED

SOURCE FLUX

1700 lm

FIXTURE SOURCE

1500 lm

APPARENT EFFICIENCY

88 %

INSULATION CLASS

III

OPERATING TA

-20° + 50°

CCT LED

3000K

CRI

80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 80000h Ta 25°C

BEAM OPENING














Medium/26°

COLORS



AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

ACCESSORIES

 <p>KIT.032 Floodlight Spike Kit H 235 x Ø 85</p>	 <p>KIT.033 Strap for floodlight L 2000 x H 25</p>
 <p>E.CAV.540.020 Cable H05RN-F L 2 mt</p>	 <p>E.CAV.540.050 Cable H05RN-F L 5 mt</p>
 <p>E.CAV.540.100 Cable H05RN-F L 10 mt</p>	 <p>MOR682P/2V Connector IP68 2Ways/2Poles L 72 x Ø 22</p>
 <p>MOR685P/3VS Connection Box IP68 3Ways/5Poles L 106 x W 140 x H 38</p>	 <p>MOR685P/4VS Connection Box IP68 4Ways/5Poles L 106 x W 120 x H 38</p>
 <p>E.TRA.632 Driver 70W 24Vdc IP20 - ON/OFF L 124 x W 80 x H 22 - 1 Driver for 1-3 Lamps</p>	 <p>E.TRA.577 Driver 25W 24Vdc IP67 - ON/OFF L 148 x W 40 x H 32 - 1 Driver for 1 Lamp</p>
 <p>E.TRA.579 Driver 100W 24Vdc IP67 - ON/OFF L 140 x W 63 x H 32 - 1 Driver for 1-5 Lamps</p>	 <p>E.TRA.592 Driver ELG 240W 24Vdc IP67 - ON/OFF L 244 x W 71 x H 38 - 1 Driver for 1-12 Lamps</p>
 <p>HUB.24V.001.ND Hub 70W 24Vdc IP66 - ON/OFF L 235 x W 200 x H 92 - 1 Hub for 1-4 Lamps</p>	