



Bloom Mini Floodlight 5000W/WRRRCMB Floodlights - Adjustable Floodlight - 24Vdc

Rev. 20/02/2024

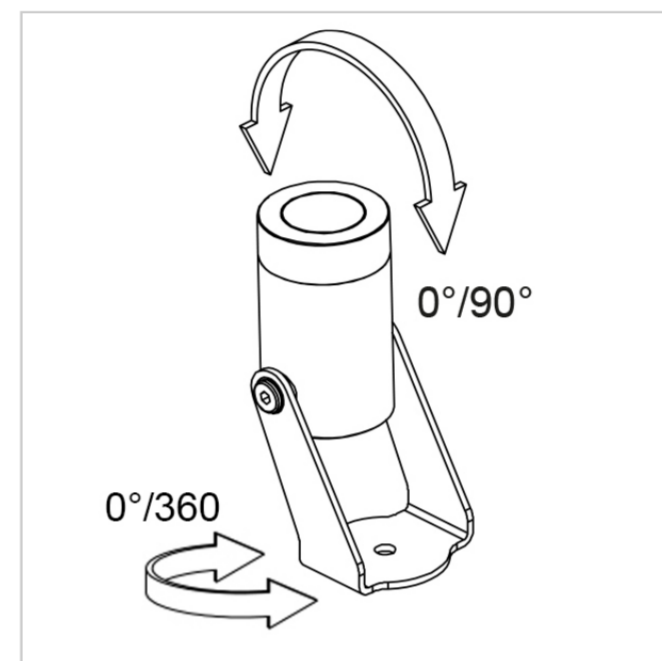

The minimal shape and the diameter of only 35mm gives the BLOOM MINI series wide adaptability to any project. The reduced sizes guarantee total flexibility, allowing the integration of BLOOM MINI in multiple contexts. Its versatility can be contextualized in gardens, for the lighting of plants, hedges, flowered areas or to enhance architectural elements, since LIGHT is the fundamental element for a correct perception of objects, spaces and emotions.

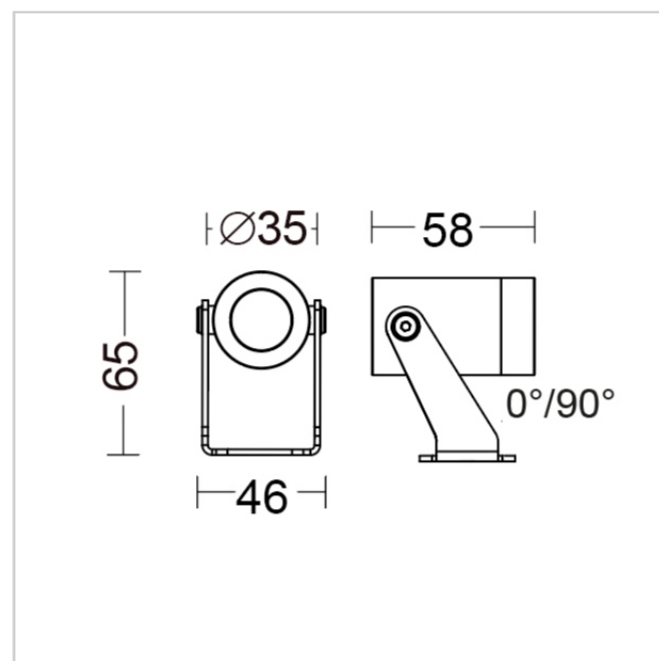

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall, ceiling and stand installation

PROTECTION

IP 66 - IK 08

BODY

Anticorodal turning aluminum 6000 Serie, for greater corrosion resistance

SCREEN

Transparent extra-clear glass 6mm

SEALS

Closed-cell EPDM rubber

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 65 x L 46 x W 58 x Ø 35

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

24Vdc

DRIVER

Remote Driver NOT INCLUDED

DRIVER CURRENT

24Vdc

CONTROL

ON/OFF

ABSORBED POWER

2W

SOURCE

LED

SOURCE FLUX

270 lm

FIXTURE SOURCE

210 lm

APPARENT EFFICIENCY

78 %

INSULATION CLASS

III

OPERATING TA

-20° + 50°

CCT LED

3000K

CRI

80

STEP MACADAM

3

LIFE TIME TM-21

L80B10 80000h Ta 25°C

BEAM OPENING














Medium/30°

COLORS



AcquaStop System Integrated. AcquaStop is a special process inside the product which, through different phases of resination, creates a real barrier, sealing the fixture in a definitive way and preventing the development of condensation inside it.

ACCESSORIES

 <p>KIT.022 Floodlight Spike Kit L 40 x W 30 x H 235</p>	 <p>KIT.027 Strap for floodlight L 2000 x H 25</p>
 <p>E.CAV.540.020 Cable H05RN-F L 2 mt</p>	 <p>E.CAV.540.050 Cable H05RN-F L 5 mt</p>
 <p>E.CAV.540.100 Cable H05RN-F L 10 mt</p>	 <p>MOR682P/2V Connector IP68 2Ways/2Poles L 72 x Ø 22</p>
 <p>MOR685P/3VS Connection Box IP68 3Ways/5Poles L 106 x W 140 x H 38</p>	 <p>MOR685P/4VS Connection Box IP68 4Ways/5Poles L 106 x W 120 x H 38</p>
 <p>E.TRA.577 Driver 25W 24Vdc IP67 - ON/OFF L 14 8x W 40 x H 32 - 1 Driver for 1-8 Lamps</p>	 <p>E.TRA.579 Driver 100W 24Vdc IP67 - ON/OFF L 140 x W 63 x H 32 - 1 Driver for 9-30 Lamps</p>
 <p>E.TRA.631 Driver 15W 24Vdc IP20 - ON/OFF L 106 x W 33 x H 22 - 1 Driver for 1-5 Lamps</p>	 <p>E.TRA.632 Driver 70W 24Vdc IP20 - ON/OFF L 124 x W 80 x H 22 - 1 Driver for 1-25 Lamps</p>
 <p>HUB.24V.001.ND Hub 70W 24Vdc IP66 - ON/OFF L 235 x W 200 x H 92 - 1 Hub for 1-8 Lamps</p>	