

Pocket 9201R/WRRCVT

Wall Recessed - Step light medium

Rev. 02/03/2024




















Pocket, the new outdoor step light line, has been conceived with an eye to detail. We recognize that each space is unique, which is why Pocket is available in three different sizes: whether it is lighting a garden, a driveway or a pedestrian path, our range meets all needs. Its compact shape does not compromise its effectiveness. In addition to its eye-catching aesthetic, our line of step light offers advanced features to enhance your outdoor experience. It can be easily fixed to the traditional electrical junction box or installed on the surface.



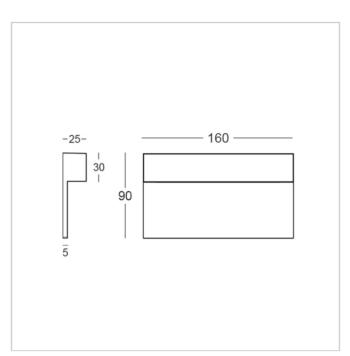

FIXTURE SPECIFICATIONS

ASSEMBLY / USAGE

Wall recessed installation

PROTECTION

IP 65 - IK 07

BODY

Die-cast aluminium

SCREEN

Pointed glass

SEALS

Molded silicone gasket UV Resist

SCREWS

Stainless steel A2

PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

SIZES

H 90 x L 160 x W 25

ELECTRICAL SPECIFICATIONS

POWER SUPPLY

24Vdc

DRIVER

Remote Driver NOT INCLUDED

DRIVER CURRENT

24Vdc

CONTROL

Dimmable

ABSORBED POWER

4W

SOURCE

LED

SOURCE FLUX

560 Im

FIXTURE SOURCE

310 lm

APPARENT EFFICIENCY

55 %

INSULATION CLASS

|||

OPERATING TA

50°

CCT LED

3000K

CRI

80

STEP MACADAM

LIFE TIME TM-21

L80B10 50000h

PHOTOBIOLOGICAL RISK

RG1

BEAM OPENING

Diffuse

COLORS



ACCESSORIES



D.BOX.035.XX Standard recessed box 503 L 108 x W 53 x H 74



E.TRA.647 Driver for Box 12W 24Vdc IP65 - ON/OFF L 57 x W 40 x H 26



E.TRA.632 Driver 70W 24Vdc IP20 - ON/OFF L 124 x W 80 x H 22 - 1 Driver for 1-12 Lamps



E.TRA.579 Driver 100W 24Vdc IP67 - ON/OFF L 140 x W 63 x H 32 - 1 Driver for 1-15 Lamps



HUB.24V.001.ND Hub 70W 24Vdc IP66 - ON/OFF L 235 x W 200 x H 92 - 1 Hub for 1-12 Lamps



HUB.24V.001.DA2 Hub 70W 24Vdc IP66 - DALI-2 L 235 x W 200 x H 92 - 1 Hub for 1-12 Lamps



D.BOX.036.XX Standard recessed box 504 L 133 x W 53 x H 74



E.TRA.631 Driver 15W 24Vdc IP20 - ON/OFF L 106 x W 33 x H 22 - 1 Driver for 1-3 Lamps



E.TRA.577 Driver 25W 24Vdc IP67 - ON/OFF L 14 8x W 40 x H 32 - 1 Driver for 1-4 Lamps



E.TRA.633 Driver 100W 24Vdc IP67 - DALI L 175 x W 63 x H 36 - 1 Driver for 1-15 Lamps



HUB.24V.001.CA Hub 70W 24Vdc IP66 - CASAMBI L 235 x W 200 x H 92 - 1 Hub for 1-12 Lamps