



## Stem Wall 350W/WRRC

Wall - Wall luminaire - Remote driver 24Vdc

Rev. 22/04/2024



Stem Wall, a disc-shaped applique that recreates enveloping atmosphere of light on the wall. The wall version of the Stem collection, products with a concept aimed at favoring the essence of light and clean design. Stem looks by a collection of garden stakes distinguished by a thin ring of light, designed to enhance the spectacular effect, the softness, and the exclusivity of the spaces. Its ideal use is the placement in green areas, bushes, intimate and welcoming outdoor living areas that evoke the warmth of home, charm and elegance. Also suitable for creating suggestive paths dedicated to embellishing entrances and walkways. Its diffused and fluid luminescence, as if it was a rarefied aura, blends into the naturalistic environment with harmony and delicacy, with the aim to build and enhance a scene by giving shape to a vision, without imposing itself on it. Precisely to favor the principle of fusion with the environment, Stem is offered in 9 paint colors, helping the needs of the client, the landscape architect, or the lighting designer. To complete the collection, there is also the wall version. Stem, the charm of the concept.

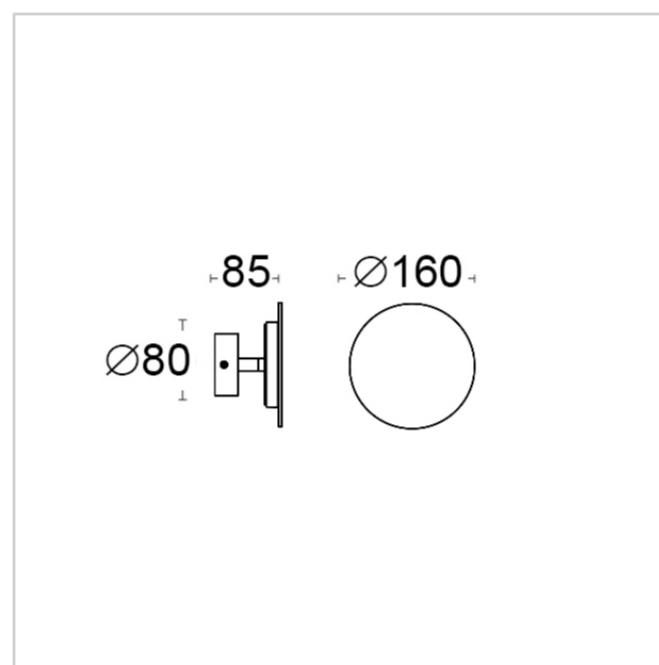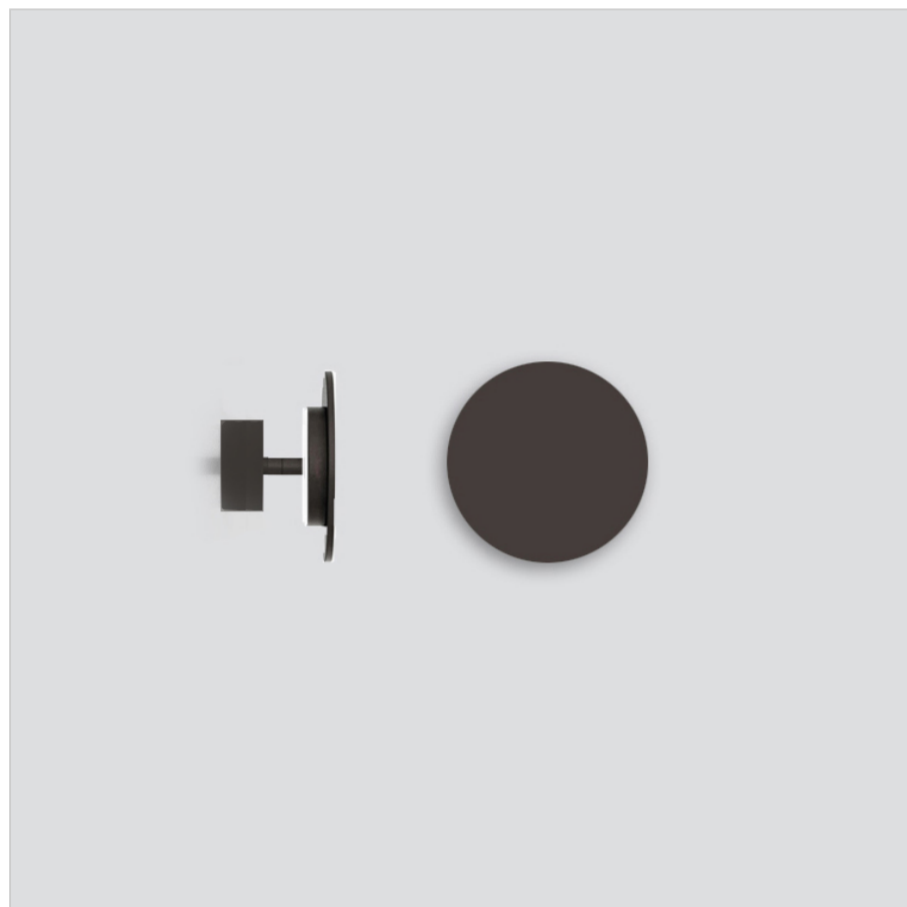

### FIXTURE SPECIFICATIONS

#### ASSEMBLY / USAGE

Wall fixing and ceiling installation

#### PROTECTION

IP 65 - IK 08

#### BODY

Die-cast aluminium

#### SCREEN

Opale Polycarbonate

#### SEALS

Closed-cell EPDM rubber

#### SCREWS

Stainless steel A2

#### PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

#### SIZES

W 85 x Ø 160 x Ø base 80

### ELECTRICAL SPECIFICATIONS

#### POWER SUPPLY

24Vdc

#### DRIVER

Remote Driver 24Vdc NOT INCLUDED

#### CONTROL

Remote DALI dimmable

#### WIRING

Accessory to be ordered separately (codes in the accessories list)

#### ABSORBED POWER

11W

#### SOURCE

LED

#### SOURCE FLUX

1420 lm

#### FIXTURE SOURCE

800 lm

#### APPARENT EFFICIENCY

56 %

#### INSULATION CLASS

III

#### CCT LED

3000K

#### CRI

>80













#### BEAM OPENING

Diffuse 360°

## COLORS



## ACCESSORIES

|  |  |
|--|--|
|  <p><b>E.CAV.540.020</b> Cable H05RN-F<br/>L 2 mt</p>   |  <p><b>E.CAV.540.050</b> Cable H05RN-F<br/>L 5 mt</p>   |
|  <p><b>E.CAV.540.100</b> Cable H05RN-F<br/>L 10 mt</p>  |  <p><b>MOR682P/2V</b> Connector IP68 2Ways/2Poles<br/>L 72 x Ø 22</p>                                       |
|  <p><b>E.TRA.631</b> Driver 15W 24Vdc IP20 - ON/OFF<br/>L 106 x W 33 x H 22 - 1 Driver for 1 Lamp</p>       |  <p><b>E.TRA.632</b> Driver 70W 24Vdc IP20 - ON/OFF<br/>L 124 x W 80 x H 22 - 1 Driver for 1-5 Lamps</p>    |
|  <p><b>E.TRA.633</b> Driver 100W 24Vdc IP67 - DALI<br/>L 175 x W 63 x H 36 - 1 Driver for 1-8 Lamps</p>   |  <p><b>E.TRA.577</b> Driver 25W 24Vdc IP67 - ON/OFF<br/>L 148 x W 40 x H 32 - 1 Driver for 1-2 Lamps</p>  |
|  <p><b>E.TRA.579</b> Driver 100W 24Vdc IP67 - ON/OFF<br/>L 140 x W 63 x H 32 - 1 Driver for 3-8 Lamps</p> |  <p><b>HUB.24V.001.ND</b> Hub 70W 24Vdc IP66 - ON/OFF<br/>L 235 x W 200 x H 92 - 1 Hub for 1-5 Lamps</p>  |
|  <p><b>HUB.24V.001.DA2</b> Hub 70W 24Vdc IP66 - DALI-2<br/>L 235 x W 200 x H 92 - 1 Hub for 1-5 Lamps</p> |  <p><b>HUB.24V.001.CA</b> Hub 70W 24Vdc IP66 - CASAMBI<br/>L 235 x W 200 x H 92 - 1 Hub for 1-5 Lamps</p> |