
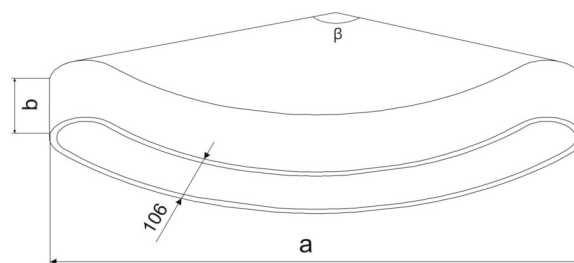


106.1880.0240.0201

MULTILINE 111 SC 25W HLED SATINE 875 Φ =1000 β =100° F

Multiline 111 is a large group of luminaires in suspended and surface-mounted version. An extensive set of standard shapes, dimensions and lighting parameters can be infinitely extended by own design of architects, designers or investors. Using the LEDs along with modern control systems moved previously closed borders of lighting systems proposal. Implementation of systems is not limited to shops, halls, corridors, offices, residential interiors only. Fixtures Multiline 111 became distinct part of the design of any interior. The housing is made of extruded aluminum profile. Surface treated by powder coating. The optical part of the luminaire is equipped with a diffuser SATINE, MIKROPRIZMA. The luminaires are used LED light sources. Control of the luminous flux is via DALI, DSI, PWM, DMX, COLORMIX TIMEDAY with optical, infrared and radio frequency devices.

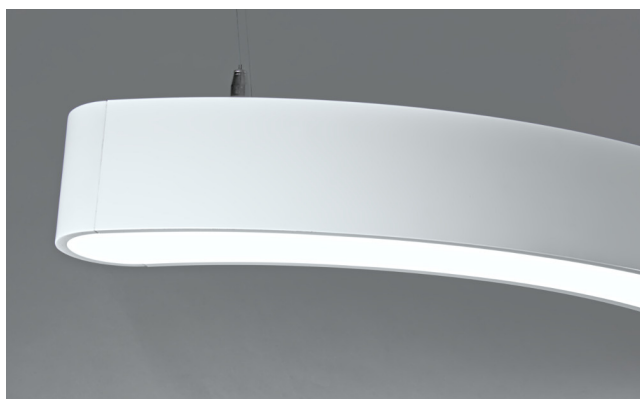

β - 40° - 134°
a (mm) - 875, 1750, 1800
b (mm) - 111

Light source: HLED-D

Direct optical part: Satine

Luminous flux: 3600 lm

Light efficiency: 86 lm/W

Lifetime of light sources: L80B10>60 000 h

Color rendering index: Ra > 80

Color temperature: 3000K, 4000K, 5700-6500

Light distribution: Direct, Symmetrical linear

Connected Load : 28,75 W

Protection class: I

Power: 230V

IP protection: IP40

Luminaire body: Aluminium profile

Surface coat: grey, white, other colours according to RAL palette price included (special powder coating – price on request)