

# MACROLUX



## mr\_12 suspended

Profiles - Sospensione

Colour: Black (92) | White (94)  
Light Temperature (°K): 2700 | 3000 | 4000  
Watt (W): 18,5 | 28 | 37 | 9,6  
Luminous flux (lm): 2200 | 3300 | 4400 | 900  
Energetic class: A+  
CRI (Color Rendering): >80

IP: 40  
Class: Class III  
Volts (V): 24V  
Size (mm): 1000 | 1500 | 2000  
Pieces: 1 | 15  
Length (mm): 3000



Conforms to European directives



Conforms to the ROHS directive



Insulation class



Equipment




Type of disposal





Protection index




Operating voltage

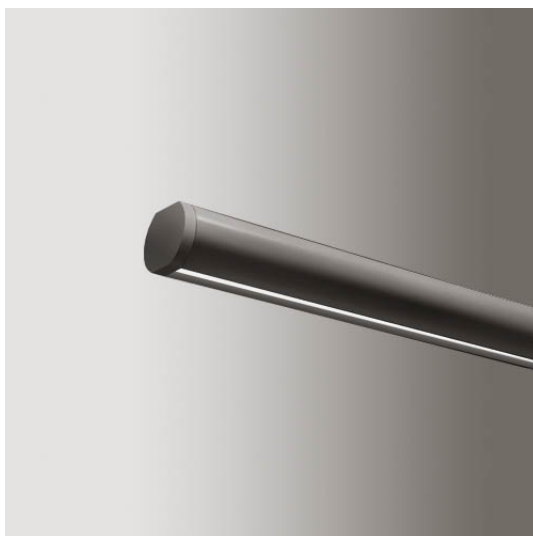

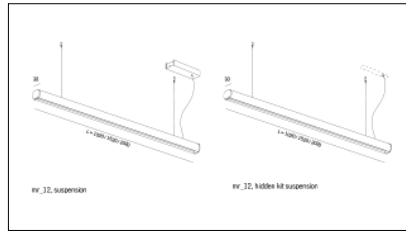


Article code	Article	Colour	Watt (W)	Light Temperature (°K)	Size (mm)
1318.0012.00.92	MR_12-92 L=max 3 m	Black (92)			
1318.0012.120.2700.92	MR_12	Black (92)	9,6	2700	
1318.0012.120.4000.92	MR_12	Black (92)	9,6	4000	
1318.0012.120.92	MR_12 9,6W 24V 3000°K	Black (92)	9,6	3000	
1318.0012.240.2700.92	MR_12	Black (92)	18,5	2700	
1318.0012.240.4000.92	MR_12	Black (92)	18,5	4000	
1318.0012.240.92	MR_12 18,5W 24V 3000°K	Black (92)	18,5	3000	
1318.0112.01.1000.2700.92	*MR_12	Black (92)	18,5	2700	1000
1318.0112.01.1000.4000.92	*MR_12	Black (92)	18,5	4000	1000
1318.0112.01.1000.92	*MR_12	Black (92)	18,5	3000	1000
1318.0112.01.1500.2700.92	*MR_12	Black (92)	28	2700	1500
1318.0112.01.1500.4000.92	*MR_12	Black (92)	28	4000	1500
1318.0112.01.1500.92	*MR_12	Black (92)	28	3000	1500
1318.0112.01.2000.2700.92	*MR_12	Black (92)	37	2700	2000
1318.0112.01.2000.4000.92	*MR_12	Black (92)	37	4000	2000
1318.0112.01.2000.92	*MR_12	Black (92)	37	3000	2000
1318.0112.1000.2700.92	*MR_12	Black (92)	18,5	2700	1000
1318.0112.1000.4000.92	*MR_12	Black (92)	18,5	4000	1000
1318.0112.1000.92	MR_12-SOSPENSIONE/1020/18.5W/3000°K-92	Black (92)	18,5	3000	1000
1318.0112.1500.2700.92	*MR_12	Black (92)	28	2700	1500
1318.0112.1500.4000.92	*MR_12	Black (92)	28	4000	1500
1318.0112.1500.92	*MR_12	Black (92)	28	3000	1500
1318.0112.2000.2700.92	MR_12-SOSPENSIONE/2020/37W/2700°K-92	Black (92)	37	2700	2000
1318.0112.2000.4000.92	*MR_12	Black (92)	37	4000	2000
1318.0112.2000.92	MR_12-SOSPENSIONE/2020/37W/3000°K-92	Black (92)	37	3000	2000

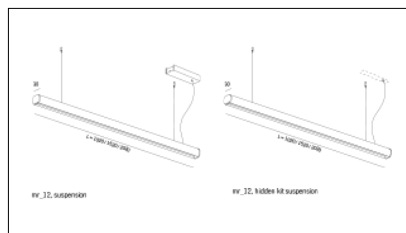


Article code	Article	Colour	Watt (W)	Light Temperature (°K)	Size (mm)
1318.0012.00.94	MR_12-94 L=max 3 m	White (94)			
1318.0012.120.2700.94	MR_12	White (94)	9,6	2700	
1318.0012.120.4000.94	MR_12	White (94)	9,6	4000	
1318.0012.120.94	MR_12 9,6W 24V 3000°K	White (94)	9,6	3000	
1318.0012.240.2700.94	MR_12	White (94)	18,5	2700	
1318.0012.240.4000.94	MR_12	White (94)	18,5	4000	
1318.0012.240.94	MR_12 18,5W 24V 3000°K	White (94)	18,5	3000	
1318.0112.01.1000.2700.94	*MR_12	White (94)	18,5	2700	1000
1318.0112.01.1000.4000.94	*MR_12	White (94)	18,5	4000	1000
1318.0112.01.1000.94	*MR_12	White (94)	18,5	3000	1000
1318.0112.01.1500.2700.94	*MR_12	White (94)	28	2700	1500
1318.0112.01.1500.4000.94	*MR_12	White (94)	28	4000	1500
1318.0112.01.1500.94	*MR_12	White (94)	28	3000	1500
1318.0112.01.2000.2700.94	*MR_12	White (94)	37	2700	2000
1318.0112.01.2000.4000.94	*MR_12	White (94)	37	4000	2000


Article code	Article	Colour	Watt (W)	Light Temperature (°K)	Size (mm)
1318.0112.01.2000.94	*MR_12	White (94)	37	3000	2000
1318.0112.1000.2700.94	*MR_12	White (94)	18,5	2700	1000
1318.0112.1000.4000.94	*MR_12	White (94)	18,5	4000	1000
1318.0112.1000.94	MR_12-SOSPENSIONE/1020/18.5W/3000°K-94	White (94)	18,5	3000	1000
1318.0112.1500.2700.94	*MR_12	White (94)	28	2700	1500
1318.0112.1500.4000.94	*MR_12	White (94)	28	4000	1500
1318.0112.1500.94	MR_12-SOSPENSIONE/1520/27.75W/3000°K-94	White (94)	28	3000	1500
1318.0112.2000.2700.94	*MR_12	White (94)	37	2700	2000
1318.0112.2000.4000.94	*MR_12	White (94)	37	4000	2000
1318.0112.2000.94	MR_12-SOSPENSIONE/2020/37W/3000°K-94	White (94)	37	3000	2000

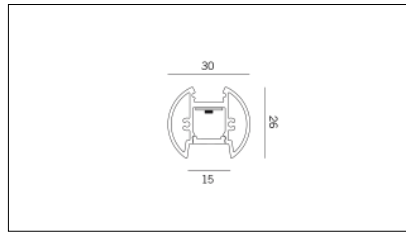


Article code	Article	Colour	Length (mm)
1318.0012.01.92	MR_12/3000-92 L=3m - EMPTY STANDARD	Black (92)	3000
1318.0012.01.M15.92	MR_12/3000-92 L=3m - 15x EMPTY STANDARD	Black (92)	3000

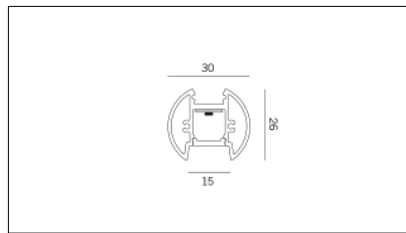


Article code	Article	Colour	Length (mm)
1318.0012.01.94	MR_12/3000-94 L=3m - EMPTY STANDARD	White (94)	3000
1318.0012.01.M15.94	MR_12/3000-94 L=3m - 15x EMPTY STANDARD	White (94)	3000




Article code	Name	Description
1324.0000	STRIP LED/Primer monouso 0,66 ml	




Article code	Name	Description
1320.1112	UNIVERSALE M_12 / MB_15	Ancoraggio plafone / giunto lineare - Compatibile con MTO_12, MT1_12, MX1_12 e MB_15
1320.1112.10	UNIVERSALE M_12/MB_15 CONFEZIONE MULTIPLA - 10 PZ	Ancoraggio plafone / giunto lineare - Compatibile con MTO_12, MT1_12, MX1_12 e MB_15




Article code	Name	Description	Colour
1318.6012.92	MR_12/TC-2	Testata di chiusura, finitura nera / End cap, finishing black (1 pz.)	Black (92)
1318.6012.92.10	MR_12/TC-2 CONFEZIONE MULTIPLA - 10 PZ	Testata di chiusura, finitura nera / End cap, finishing black	Black (92)




Article code	Name	Description	Colour
1318.6012.94	MR_12/TC-4	Testata di chiusura, finitura bianco / End cap, finishing white (1 pz.)	White (94)
1318.6012.94	MR_12/TC-4	Testata di chiusura, finitura bianco / End cap, finishing white (1 pz.)	White (94)




Article code	Name	Description
1318.8012	MR_12/KS	Kit sospensione h. 1.8 mt / Hanging kit h. 1.8 mt (1 pz.)




Article code	Name	Description	Colour
1324.10127.4	MX/KA/IN/CG-4	Kit alimentazione a copertura magnetica con contenitore driver ad incasso per cartongesso, finitura bianco / Feeding kit with magnetic cover with recessed driver box for plasterboard, finishing white	White (94)




Article code	Name	Description	Watt (W)	Driver's type
1.024015	15W Constant Voltage 24V	Alimentatore Led 24V 15W C230-240V IP40 Classe II	15	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024020	20W Constant Voltage 24V	Alimentatore Led 24V 20W C230-240V IP40 Classe II	20	On/Off




Article code	Name	Description	Watt (W)	Driver's type
1.024030	Driver 30W 24V		30	On/Off




Article code	Name	Description	Watt (W)	Driver's type	Colour
1.024050	Driver 50W 24V		50	On/Off	




Article code	Name	Description	Watt (W)	Driver's type
1.024075	Driver 75W 24V		75	On/Off




Article code	Name	Description	Watt (W)	Current
1.97759	Driver LED 24V 150W IP67		150	Fixed current



Article code	Name	Description	Watt (W)	Current
1.97745	Driver LED 24V 200W IP67		200	Fixed current



Article code	Name	Description	Colour
1324.9128.4	KA/75/OUT-4	Kit alimentazione con contenitore driver per versione sospesa, MAX 75W, finitura bianco / Feeding kit with driver box for hanging version, MAX 75W, finishing white	White (4)



Article code	Name	Description	Colour
1324.9127.4	KA/30/OUT-4	Kit alimentazione con contenitore driver per versione sospesa, MAX 30W, finitura bianco / Feeding kit with driver box for hanging version, MAX 30W, finishing white	White (4)