


## Pocket 9200R/WRRCVT Wall Recessed - Step light small

Rev. 02/03/2024



Pocket, the new outdoor step light line, has been conceived with an eye to detail. We recognize that each space is unique, which is why Pocket is available in three different sizes: whether it is lighting a garden, a driveway or a pedestrian path, our range meets all needs. Its compact shape does not compromise its effectiveness. In addition to its eye-catching aesthetic, our line of step light offers advanced features to enhance your outdoor experience. It can be easily fixed to the traditional electrical junction box or installed on the surface.

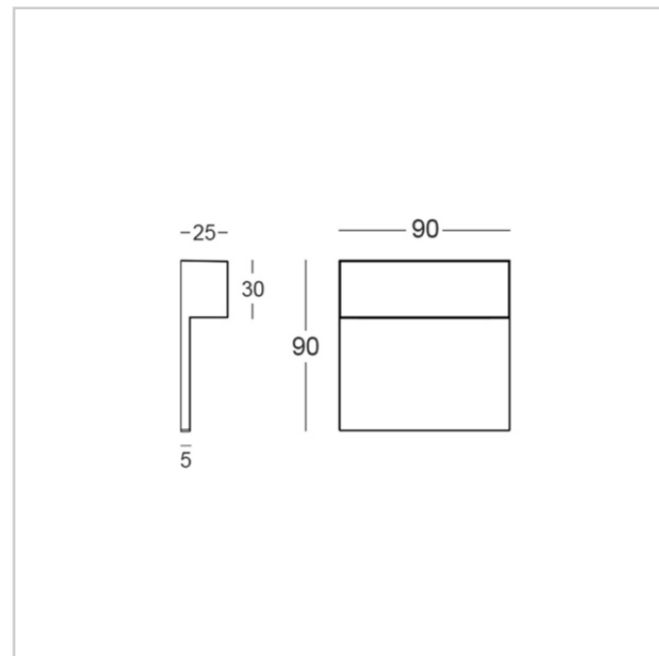

### FIXTURE SPECIFICATIONS

#### ASSEMBLY / USAGE

Wall recessed installation

#### PROTECTION

IP 65 - IK 07

#### BODY

Die-cast aluminium

#### SCREEN

Pointed glass

#### SEALS

Molded silicone gasket UV Resist

#### SCREWS

Stainless steel A2

#### PAINT / FINISHING

Anti-corrosive UV stabilised polyester powder

#### SIZES

H 90 x L 90 x W 25

### ELECTRICAL SPECIFICATIONS

#### POWER SUPPLY

24Vdc

#### DRIVER

Remote Driver NOT INCLUDED

#### DRIVER CURRENT

24Vdc

#### CONTROL

Dimmable

#### ABSORBED POWER

2W

#### SOURCE

LED

#### SOURCE FLUX

280 lm

#### FIXTURE SOURCE

160 lm

#### APPARENT EFFICIENCY

57 %

#### INSULATION CLASS

III

#### OPERATING TA

50 °

#### CCT LED

3000K

#### CRI

80

#### STEP MACADAM

3

#### LIFE TIME TM-21

L80B10 50000h

#### PHOTOBIOLOGICAL RISK

RG1











#### BEAM OPENING

Diffuse

## COLORS



## ACCESSORIES

 <p><b>D.BOX.034.XX</b> Standard recessed box 502 L 70 x W 50 x H 70</p>	 <p><b>E.TRA.646</b> Driver for Box 4W 24Vdc IP65 - ON/OFF L 43 x W 29.5 x H 22</p>
 <p><b>E.TRA.631</b> Driver 15W 24Vdc IP20 - ON/OFF L 106 x W 33 x H 22 - 1 Driver for 1-6 Lamps</p>	 <p><b>E.TRA.632</b> Driver 70W 24Vdc IP20 - ON/OFF L 124 x W 80 x H 22 - 1 Driver for 1-25 Lamps</p>
 <p><b>E.TRA.577</b> Driver 25W 24Vdc IP67 - ON/OFF L 14 8x W 40 x H 32 - 1 Driver for 1-8 Lamps</p>	 <p><b>E.TRA.579</b> Driver 100W 24Vdc IP67 - ON/OFF L 140 x W 63 x H 32 - 1 Driver for 1-30 Lamps</p>
 <p><b>E.TRA.633</b> Driver 100W 24Vdc IP67 - DALI L 175 x W 63 x H 36 - 1 Driver for 1-30 Lamps</p>	 <p><b>HUB.24V.001.ND</b> Hub 70W 24Vdc IP66 - ON/OFF L 235 x W 200 x H 92 - 1 Hub for 1-25 Lamps</p>
 <p><b>HUB.24V.001.CA</b> Hub 70W 24Vdc IP66 - CASAMBI L 235 x W 200 x H 92 - 1 Hub for 1-25 Lamps</p>	 <p><b>HUB.24V.001.DA2</b> Hub 70W 24Vdc IP66 - DALI-2 L 235 x W 200 x H 92 - 1 Hub for 1-25 Lamps</p>